



**IP65**      **Rated for enclosed fixtures**      **360° beam**


**TECHNICAL SPECIFICATIONS:**

- :: Input voltage: 120-277V AC
- :: CCT: 3000K and 5000K
- :: CRI: 84 CRI
- :: Lamp base: E26 medium base for CL-54W, E39 mogul base for CL-120W
- Mogul base adaptors optional
- :: Chip: Samsung LED chips with Rubycon driver
- :: Beam angle: 360°
- :: LED quantity: 56 x (18W) / 108 x (36W)
- :: Operating temp: -20°C~+65°C



**APPLICATIONS:**

- :: Ideal for retrofitting existing HID highbay, shoebox, flood light, or wall pack fixtures
- :: Can be used in enclosed luminaires

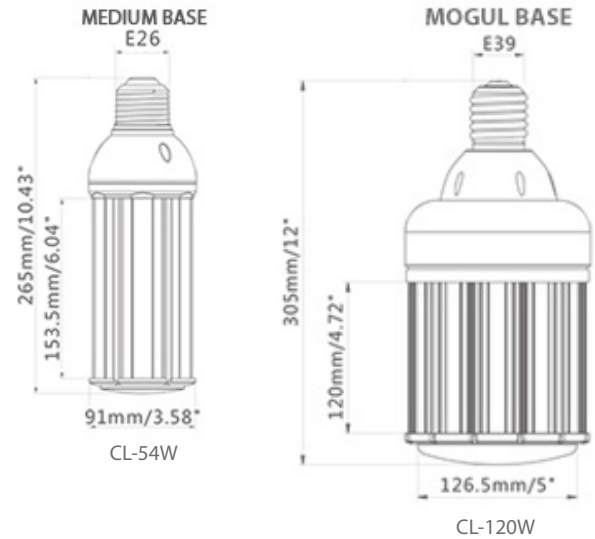

Samsung LM561B



Rubycon




E26 (E39 adaptor optional)



Long Lifespan of 10years



Rated for 1M switches




Safety Protection Circuit



No Mercury No UV Light



Big Saving (87%) on Electricity Costs



Usable in Enclosed Luminaires



Omni Wide Angle 360°

**CORN LAMP (54W & 120W)**

| CATALOG NO. | WATTAGE | LUMENS | VOLTAGE     | DIMENSION                  | WEIGHT     | COLOR TEMP |
|-------------|---------|--------|-------------|----------------------------|------------|------------|
| CL-54W-30K  | 54W     | 5440   | 120-277V AC | 10-1/2" (H) x 3-3/4" (Dia) | 2 lbs.     | 3000K      |
| CL-54W-50K  | 54W     | 5700   | 120-277V AC | 10-1/2" (H) x 3-3/4" (Dia) | 2 lbs.     | 5000K      |
| CL-120W-30K | 120W    | 12000  | 120-277V AC | 12" (H) x 5-3/4" (Dia)     | 3-1/2 lbs. | 3000K      |
| CL-120W-50K | 120W    | 12600  | 120-277V AC | 12" (H) x 5-3/4" (Dia)     | 3-1/2 lbs. | 5000K      |

**E39 REDUCER**      Reduces E39 bulb to be used in E26 socket

L24



Corn Lamps

